



# 221/223

## Fully Automatic Case Erectors



### Dual Opposing Vacuum Case Opening

This unique design feature ensures that each case is opened positively from both sides. It ensures the efficient and reliable opening of cases, and overcomes problems that can be associated with stiff board and glue migration from the manufacturer's joint.



### Compact

With a surprisingly compact footprint these machines will fit in to areas with restricted floor space or areas not normally suited to the installation of large or bulky machinery.



### Easy to Use

The 220 series is designed with clear access, simple controls and quick to adjust to size changes. The machines are operator friendly and allow for quick and easy size change, cleaning and maintenance to ensure minimal machine down time.



### Low Cost of Ownership

The Endline 220 Series of Case Erectors is designed to give you the best possible value for your investment through maximum productivity with minimal stoppage time for problem-solving or case size changes.



### Clear Access

Simple mechanical operation and clear access for easy size change, cleaning and maintenance.



### Robust Construction

High quality components, housed in a robust, computer designed chassis allow for minimal servicing. Designed for the rigours of typical end-of-line packaging environments.






## 221 & 223

Fully Automatic  
Case Erectors

### Options include:

- Extended Hopper Magazine
- Low hopper sensing
- Low tape and no tape sensing
- Visual/audible failure alarm
- Low glue sensing (223)
- High speed

221 dimensions shown

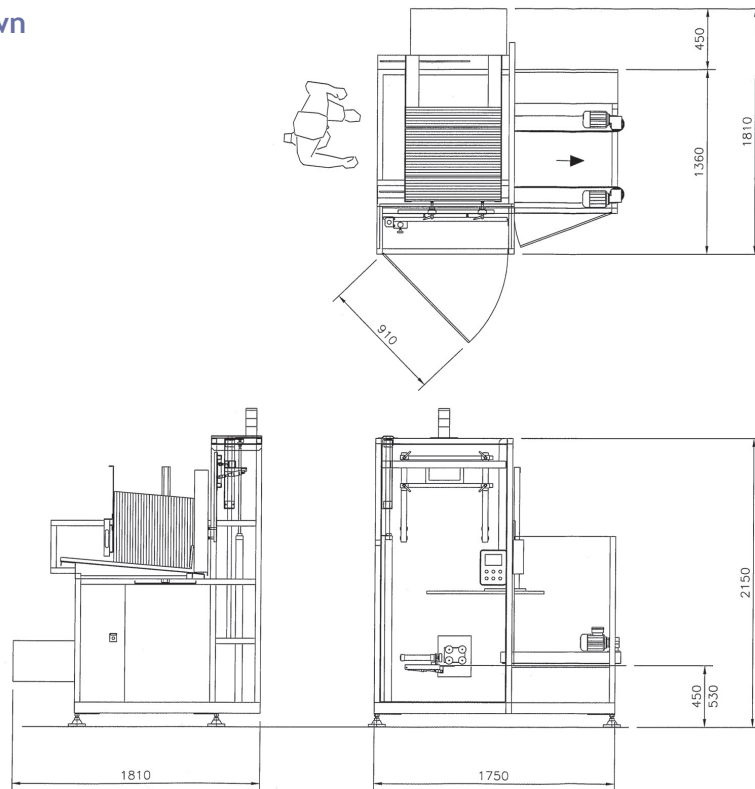

Case Dimensions (mm).

	Length	Width	Height (Open)
221/223 Minimum	200	150	175
Maximum	500	400	600

### Note:

- The 221 case erector seals cases with self-adhesive tape.
- The 223 case erector seals cases with hot melt glue.
- Case speeds subject to case size.
- Machine can be modified for cases outside case size range. Please contact Endoline to advise.

### Electrical

- Type 221 Three phase: 380 - 415V, 50Hz, 0.5kW
- Type 223 Three phase: 380 - 415V, 50Hz, 4.0kW

### Machine Finish

- Mild steel, powder coated white (RAL 9010) or stainless steel

### Speed

- Standard in feed up to 16 cases per minute
- Optional up to 18 cases per minute

### Pneumatics

- 80psi (5.5 bar)

### Tape Size

- Standard: up to 50mm wide
- Optional: up to 75mm wide

© Endoline reserves the right to change specifications without prior notice.

### Endoline Machinery Limited

Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom  
Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endoline-automation.com

