



500 Series Fully-Automatic Hot Melt Glue Tray Erector



Easy to Operate

The 500 series machines have simple mechanical operation and clear access for easy size change, cleaning and maintenance. They have full length interlocked doors for easy access.



Quick Size Change

The tray erectors take just minutes to adjust to size changes, and the simple operator controls mean that down time is kept to a minimum.



Robust Construction

High quality components housed in a robust chassis ensure minimal servicing and enable 24 hour operation. All our case tapers are designed for the rigours of typical end-of-line packaging environments.



Large Capacity

These machines can hold 200 'B' flute blanks which can be replenished during operation, therefore keeping the machine running smoothly



Compact

With a surprisingly compact footprint these machines will fit in to areas with restricted floor space or areas not normally suited to the installation of large or bulky machinery.



Low Cost of Ownership

The Endoline 500 Series Case Erectors are designed to give you the best possible value for your investment. Our unique set of features and benefits means you will gain the maximum productivity with minimal stoppage time for problem-solving or case size changes.



www.endoline-automation.com

Tray Erectors




500 Series

Fully-Automatic Hot Melt Glue Tray Erector

Options include:

- Low board magazine sensing
- Make on demand sensing
- Visual/audible failure alarm

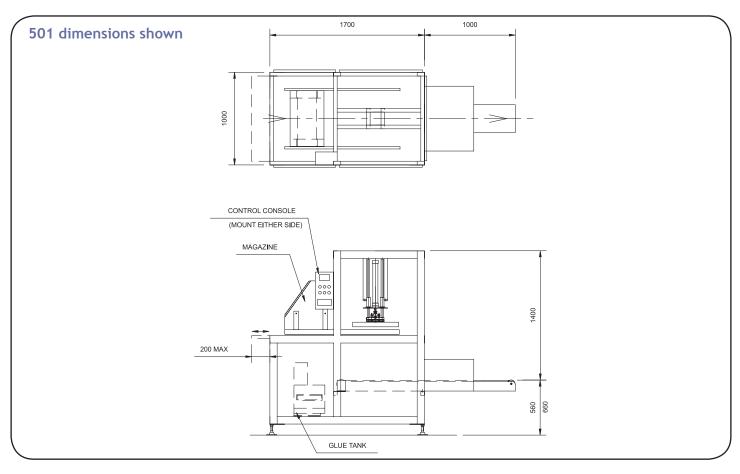



Tray Dimensions (mm).

	Length	Width	Height (Open)
Type 501	200-470	200-500	40-135
Type 502	200-800	200-920	40-150

Note:

- All 500 series tray erectors seals cases with hot melt glue.
- Tray speeds subject to tray size.
- The 500 series can operate on a wide range of tray styles.



Machine can be modified for cases outside case size range. Please contact Endoline to advise.

Blank Size (mm).

	Minimum	Maximum
Type 501	250 x 280	520 x 600
Туре 502	280 x 470	1000 x 1000

Electrical Supply

• Three phase: 415V, 50Hz, 3kW

Machine Finish

• Mild steel, powder coated white (RAL9010) or stainless steel

© Endoline reserves the right to change specifications without prior notice.

Endoline Machinery Limited

Pneumatics80psi (5.5 bar)

Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endoline-automation.com

www.endoline-automation.com