



*(Flexi Conveyor shown is optional)*

# 610

## Semi-Automatic Pre-Set Case Taper



### Floating Bridge

The floating bridge allows the machine to accept swollen or out-of-specification cases while providing consistent and accurate sealing. A bridge-latch enables quick and easy access to the bottom tapehead for quick tape reload without re-adjustment.



### Interchangeable Tapeheads

The instantly removable, interchangeable tapeheads are easily loaded and are fitted with integral steel knife guards. This means that fewer spare tapeheads are required thereby significantly reducing spare parts costs. Rapid tape reload (top and bottom) can be achieved just by swapping tapeheads.



### Twin Column Construction

The use of our unique twin column design provides added stability for the taping bridge to ensure the machine runs smoothly at all times with minimal interruption and it provides the support necessary for the floating bridge feature.



### Efficient

This machine is designed for quick and easy manual size change and a tool-free changeover for each case size and can be run by a single operator with automatic taping to improve case packing efficiency.



### Compact

Our machines have a compact footprint and will not take up a great deal of space in your production area. They are fully portable with adjustable legs with height scales for easy installation.



### Low Cost Of Ownership

All Endoline's machines are designed for maximum efficiency and productivity thereby reducing the cost of ownership to a minimum. This case sealer come sat a low capital cost and immediate savings can be seen through reduced labour costs and increased packing speeds.






## 610

Semi-Automatic  
Pre-Set Case Taper

### Options include:

- Case clamps
- Discharge conveyor
- Top brush
- Spares kit

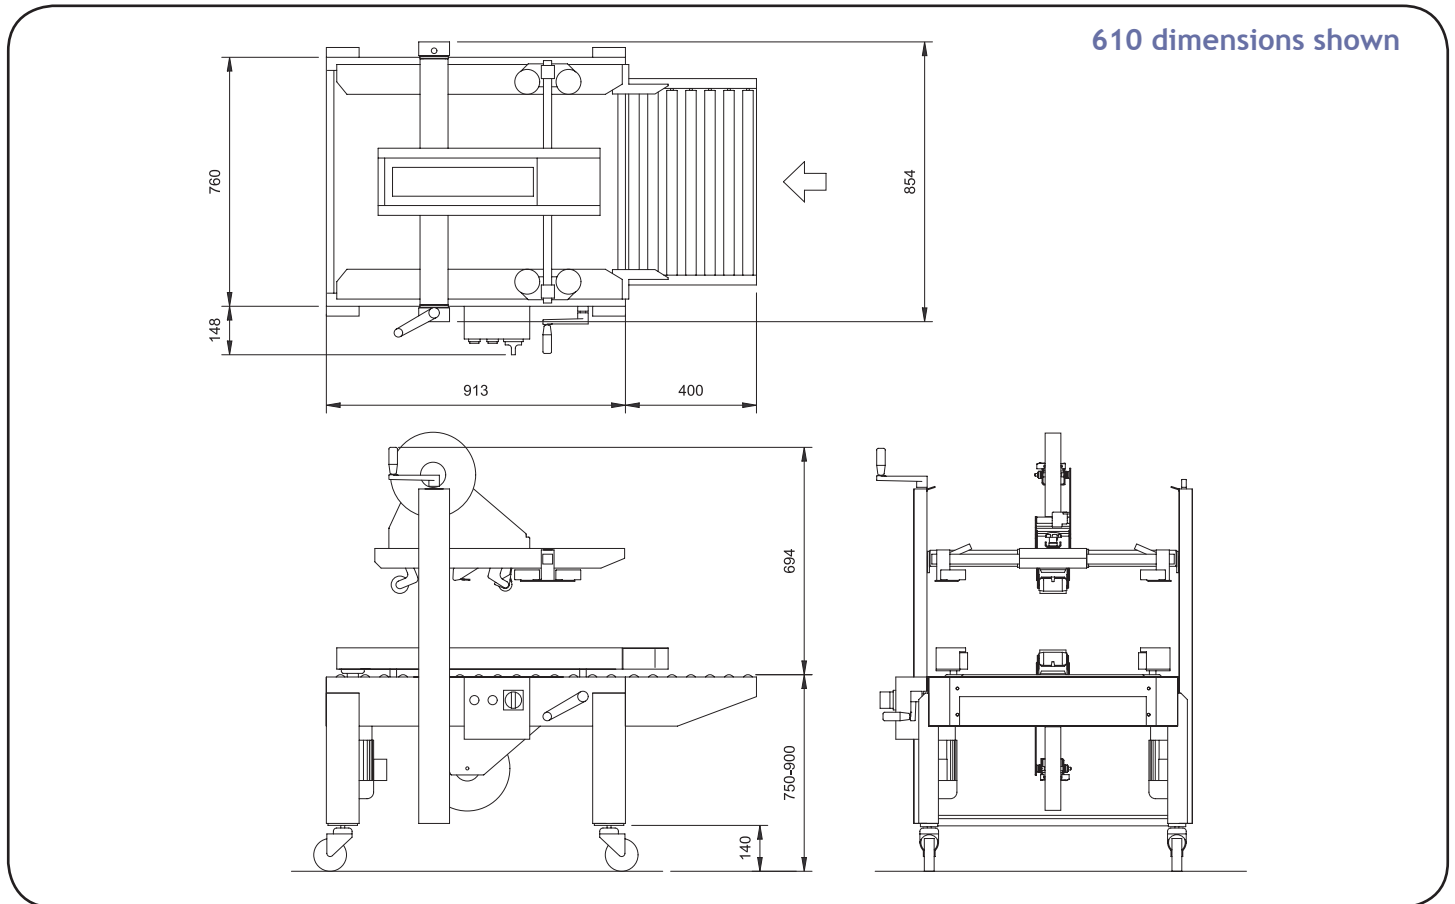

### Case Dimensions (mm).

Length	Width	Height
120 to inf	100 to 500	110 to 500

### Electrical Supply

- 240V/1ph/50Hz
- 500W
- 2 amps nominal

### Machine Finish

- Mild steel painted RAL9010

### Tape Size

- Standard: up to 50mm wide

### Bed Height

- With castors 600 - 820mm

### Handing

- Right to left
- Left to right

### Controls

- Stop/Start and Remote  
Emergency Stop

© Endline reserves the right to change specifications without prior notice.

### Endline Machinery Limited

Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom  
Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endline-automation.com

