



621/625

Pre-Set Semi Automatic Case Sealer



#### **Efficient**

The 625 has a unique 'floating bridge' feature that copes with swollen or out of specification cases. This means it is less critical to obtain exact height adjustments, therefore considerably reducing changeover time.



### **Interchangeable Tapeheads**

The 625 has two identical, easy to thread interchangeable tapeheads, which means that tape reloading time is reduced.



## **Flexible**

The 621 can be used for bottom tape only and the 625 can be used as top and bottom tape. Both can be integrated with a 100 series case former to reduce packing time further.



## **Clear Access**

The machine design provides quick and easy access to the bottom tape head and the computer designed chassis reduces dirt traps for ease of cleaning and maintenance.



## **Ease of Operation**

The machine automatically re-sets after tape loading and the simple construction allows for lower maintenance through fewer moving parts.



## Compact

Our machines have a compact footprint and will not take up a great deal of space in your production area. They are fully portable with adjustable legs with height scales for easy installation.



# **Pre-set Case Sealers**




621/625

Pre-Set Semi Automatic Case Sealer

## **Options include:**

- Low tape sensing
- · Low tape and no tape sensing
- Visual/audible alarm
- · Discharge blocked sensing
- Packing tables
- Infeed/discharge conveyors
- Coding systems

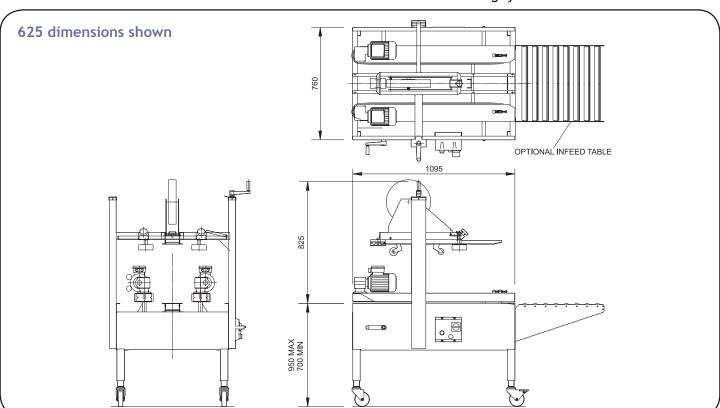



## Case Dimensions (mm).

|          | Length  | Width   | Height (high position) |
|----------|---------|---------|------------------------|
| Type 621 | 110-inf | 100-500 | 60-inf                 |
| Type 625 | 110-inf | 100-500 | 110-510                |

## Note:

 Machine can be modified for cases outside case size range. Please contact Endoline to advise.

## **Electrical**

- Single Phase: 240V, 50Hz, 0.36kW
- Three Phase: 415V, 50Hz, 0.36kW

## **Machine Finish**

• Mild steel powder coated white (RAL 9010) or stainless steel

#### Tape Size

- Standard: up to 50mm wide
- Optional: up to 75mm wide

© Endoline reserves the right to change specifications without prior notice.

## **Endoline Machinery Limited**

Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endoline-automation.com

