



704

Fully-Automatic Random Case Sealer



Fully Automatic

No operator required except for tape reel changing, the 704 provides secure, accurate taping at maximum speed of 14 cases/minute.



Robust Construction

High quality components housed in a robust chassis ensure minimal servicing and enable 24 hour operation. Designed for the rigours of typical end-of-line packaging environments.



Random Case Sealing

The Endoline 704 will automatically adjust its settings to close and seal 0201 cases throughout the case size range in any random sequence. The 704 can operate on small, large, lightweight or heavy cases at speeds of up to 14 cases per minute.



Four Column Construction

The use of our unique four column design provides added stability for the taping bridge to ensure the machine runs smoothly at all times with minimal interruption and it provides the support necessary for the floating bridge feature. This fully automatic machine is fitted with two pairs of columns for additional support to the folding section.



Compact

The Endoline 704 can help increase factory space as multiple lines can feed into one machine. The 704 is well suited to environments where there is insufficient space for multiple sealers or there are regular case size changes.



Low Cost Of Ownership

All Endoline's machines are designed for maximum efficiency and productivity thereby reducing the cost of ownership to a minimum. This case sealer comes at a low capital cost and immediate savings can be seen through reduced labour costs and increased packing speeds.



Random Case Sealers




704


Fully-Automatic Random Case Sealer

Options include:

- Discharge conveyor
- Top brush
- Spares kit

704 dimensions shown

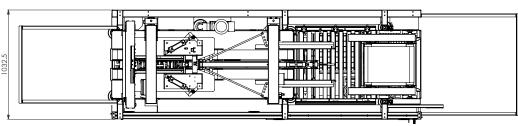

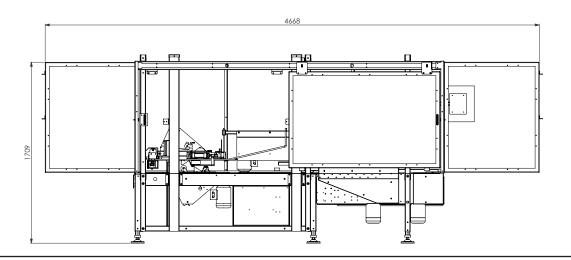



Note.

- Speeds up to 14 cases per minute subject to case
- Machine can be modified for cases outside case size range. Please contact Endoline to advise.

Case Dimensions (mm).

Length	Width	Height
200-600	140-420 (or 170-480)	110-480

Electrical Supply

• Three Phase: 415V, 50Hz

Machine Finish

• Mild steel, powder coated white (RAL 9010) or stainless steel

Pneumatics

• 80psi (5.5 bar)

Tape Size

• 38mm, 50mm, 75mm

 $\ensuremath{\mathbb{C}}$ Endoline reserves the right to change specifications without prior notice.

Endoline Machinery Limited

Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endoline-automation.com

