



7048

Fully-Automatic Random Case Sealer



Fully Automatic

The 7048 is a fully automatic case sealer and requires no manual intervention. The machine will automatically close the top case flaps and seal on the top and bottom with tape. The 7048 provides secure, accurate taping at maximum speed of 14 cases a minute.



Robust Construction

High quality components housed in a robust chassis ensure minimal servicing and enable 24 hour operation. Designed for the rigours of typical end-of-line packaging environments.



Random Case Sealing

The Endline 7048 can run different size cases in any sequence without any manual adjustments. The machine will automatically detect the size of the case in the infeed and adjust its settings to suit the required case. The 7048 can operate on small, large, lightweight or heavy cases offering total flexibility.



Health & Safety

The 7048 machine meets safety requirements and design intent as per EN 415-7, performance level d Cat 3. Including configurable safety relays, dual safety rated dump valve, infeed safety light curtain (EN ISO 13849-1), fully interlocked RFID coded non-contact guard switches and a secure outfeed tunnel guard.



Compact

The Endline 7048 can help increase factory space as multiple lines can feed into one machine. The 7048 is well suited to environments where there is insufficient space for multiple sealers or there are regular case size changes.



Low Cost Of Ownership

All Endline's machines are designed for maximum efficiency and productivity thereby reducing the cost of ownership to a minimum. This case sealer comes at a low capital cost and immediate savings can be seen through reduced labour costs and increased packing speeds.



Random Case Sealers






7048

Fully-Automatic
Random Case Sealer

Options include:

- Side drive available for light cases
- Remote access via modem or internet connection
- Designed to meet a customer's specific specification

7048 dimensions shown

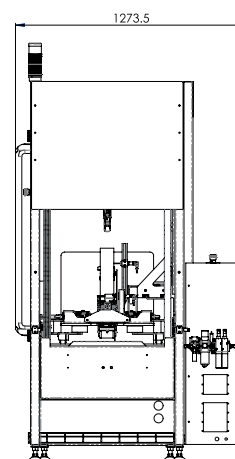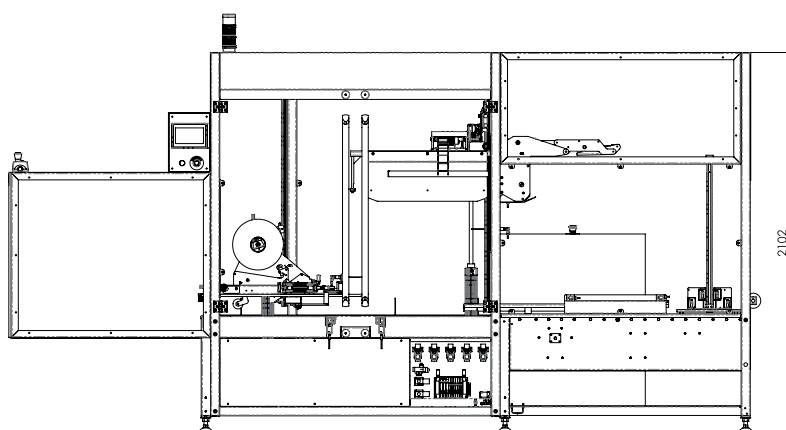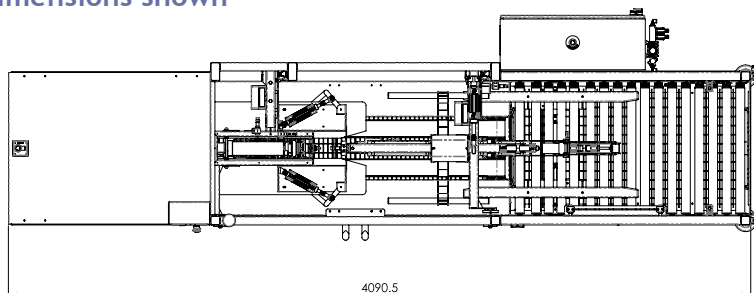

Case Dimensions (mm).

	Length	Width	Height
Maximum	650	500	480
Minimum	200	200	110

Note:

- Speeds up to 14 cases per minute subject to case size.
- Machine can be modified for cases outside case size range. Please contact Endline to advise.

Electrical Supply

- Three Phase:
415V, 50Hz

Machine Finish

- Mild steel, powder coated white (RAL 9010) or stainless steel

Pneumatics

- 80psi (5.5 bar)

Tape Size

- 32mm, 50mm, 75mm tape sizes.
All tape sizes can be changed over on site.

© Endline reserves the right to change specifications without prior notice.

Endline Machinery Limited

Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom
Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endline-automation.com

www.endline-automation.com

